

VTO1210B-X-S1

Apartment Outdoor Station



Technical Specification

Model	VTO1210B-X-S1
-------	---------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	4mm
Angle of View	H:71°, V:52°, D:92°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Display

LCD Screen	3" STN 128x64
------------	---------------

Operation Mode

Keypad	Touch Button
Reader	Mifare Card

Approaching Induction

Body approaching	0.6m
------------------	------

Features

- HD CMOS camera
- Tempered glass panel, IP65(Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Night vision & Voice indication
- Local card opening
- Video & Audio messaging
- Flush mounted



Interface

Door Control	1
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1


Network

Ethernet	10M/100Mbps
Network Protocol	TCP/IP


General

Ingress Protection	IP65
Tamper Switch	1
Installation	Flush
Material	Tempered glass
Power	DC 12V
Power Consumption	Work ≤10W
Working Temperature	-30°C to +60°C
Relative Humidity	10%RH~90%RH
Dimensions	150.0mm×408.0mm×46.4mm
Weight	1.6kg

Dimensions

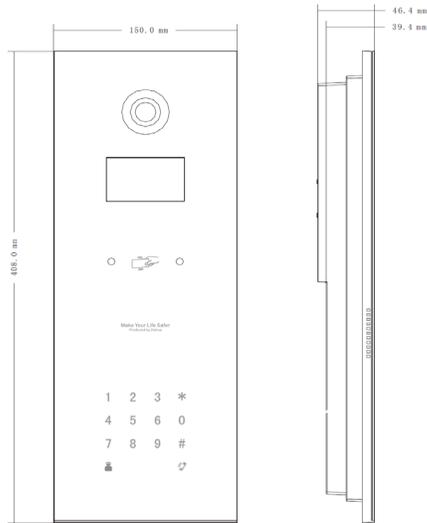

View Area

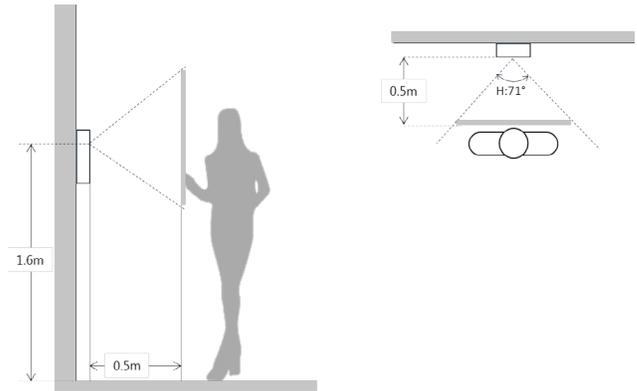

Application

