


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	DRAWN
	A			



No#	Description	Material	Q'TY
1	FTP PLUG ASSY	polycarbonate, 94V-0, the contact Area of blades is selected plated with 50micro-inches of hard gold over 100micro-inches of Nickel. fire retardant PVC compounds.	2
2	CAT.6A PATCH CABLE (C6A單體 S/FTP) 松普印刷	LC4PRXMXIXX-HFS SURTEC E132276-A (UL) CM c(UL) CMG 75° C FT4 4PR 26AWG TIA/EIA-568-B-2-10 CAT.6A PATCH CORD--S/FTP	1
3	ASSEMBLED SR	fire retardant PVC compounds.	2
4	STICK: 線位	LL1A01012C6A-H 100% TESTED 貼紙 T568B	1

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
INCH .016 .XX ± 0.2
MM .008 .XX ± 0.1
ANGULAR X ± 1° .X ± .5°

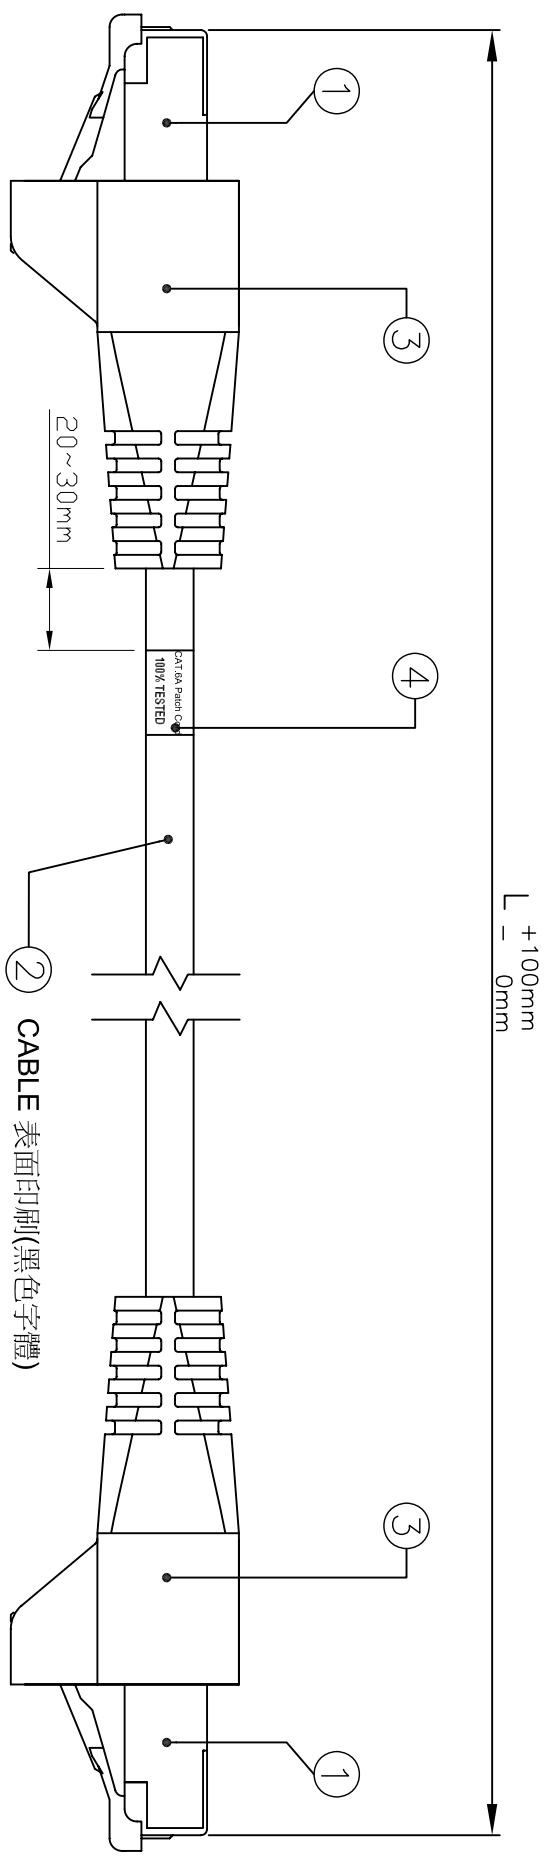

TITLE
S/FTP CAT.6A PATCH CORD

PROJECT ID 21B-SA-XXWT	DATE	FILE Winnie	DRAWN	CHECK	APPROVED
SIZE A4	DRAWING NUMBER	PART NUMBER	REV A	SCALE 1:1	UNIT MM
SHEET 1 OF 1			SHEET 1 OF 1		